


HAC336D-VB4Z

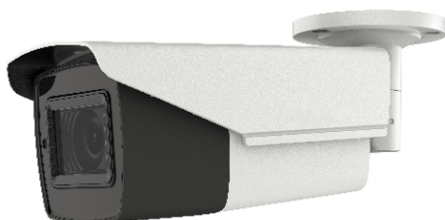

FEATURES

5 MP Motorized Varifocal Bullet Camera

- 5 MP high performance CMOS
- Auto focus
- 2560 × 1944 resolution
- 2.7 mm to 13.5 mm motorized varifocal lens
- Smart IR, up to 40 m IR distance
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67
- Up the coax (UTC-C)

Resolution	2560 (H) × 1944 (V)
Min. Illumination	Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR
Frame Rate	TVI: 5 M @ 20 fps, 4 M @ 30 fps, 4 M @ 25 fps, 1080p @ 30 fps, 1080p @ 25 fps AHD: 5 M @ 20 fps, 4 M @ 30 fps, 4 M @ 25fps CVI: 4 M @ 30 fps, 4 M @ 25 fps CVBS: PAL/NTSC
Shutter Time	1/30 s to 1/50, 000 s
Lens	2.7 mm to 13.5 mm motorized varifocal lens
Horizontal Field of View	95° to 26°
Lens Mount	Φ 14
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360°
WDR (Wide Dynamic Range)	Digital WDR
Day/Night Mode	Auto/Color/BW (Black and White)
White Balance	Auto/Manual
2D DNR	YES
Language	English
Functions	Brightness, Sharpness, Smart IR

Video Output	1 HD analog output
Switch Button	TVI/AHD/CVI/CVBS
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensing)
Power Supply	12 VDC±15%, 24 VAC±15%
Power Consumption	Max. 8.8 W
Protection Level	IP67
Material	Front Cover: Metal Body: Plastic
IR Range	Up to 40 m
Communication	Up the coax, Protocol: UTC-C (TVI output)
Dimensions	3.33" x 3.62" x 10.04"
Weight	1.5 lbs
Junction Box	HTH-280ZJ-S
Pole Mount	HTH-275ZJ-SUS
Corner Mount	HTH-276ZJ-SUS