




# HAC344D-VB4Z

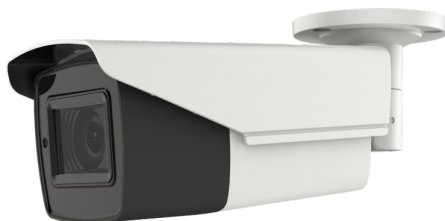

## FEATURES

### 2 MP Ultra Low-Light VF EXIR Bullet Camera

- HD analog output, up to 1080p resolution
- 2.7 mm to 13.5 mm motorized vari-focal lens
- True Day/Night
- 120 dB true WDR
- OSD menu, DNR, Smart IR
- EXIR 2.0, up to 80 m IR distance
- IP67
- Up the Coax

|                          |                                                      |
|--------------------------|------------------------------------------------------|
| Image Sensor             | 2 MP CMOS                                            |
| Frame Rate               | PAL:1080p@25fps NTSC: 1080p@30fps                    |
| Resolution               | 1920 (H) × 1080 (V)                                  |
| Min. illumination        | Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR     |
| Shutter Time             | PAL:1/25 s to 1/50, 000s NTSC: 1/30 s to 1/50, 000 s |
| Slow Shutter             | Max. 16 times                                        |
| Lens                     | 2.7 mm to 13.5 mm motorized, auto focus              |
| Horizontal Field of View | 32.1° to 103°                                        |
| Day & Night              | IR cut filter                                        |
| Angle Adjustment         | Pan: 0° to 360°, Tilt:0° to 90°, Rotate: 0° to 360°  |
| Synchronization          | Internal synchronization                             |
| WDR (Wide Dynamic Range) | > 130 dB                                             |
| Day/Night Mode           | Auto/Color/BW (Black and White)                      |
| White Balance            | ATW/MANUAL                                           |
| Privacy Mask             | ON/OFF, 4 programmable privacy masks                 |
| Motion Detection         | 4 programmable motion areas                          |
| Backlight Compensation   | WDR/BLC/HLC/OFF                                      |

|                                  |                                                                              |
|----------------------------------|------------------------------------------------------------------------------|
| 3D DNR (Digital Noise Reduction) | On                                                                           |
| Functions                        | Brightness, Sharpness, Mirror, Smart IR                                      |
| Video Output                     | 1 HD analog output                                                           |
| Operating Conditions             | -40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation) |
| Power Supply                     | 12 VDC±25% -A: 12 VDC±25%, 24 VDC±25%                                        |
| Power Consumption                | Max. 9W                                                                      |
| Ingress Protection               | IP67                                                                         |
| Material                         | Metal                                                                        |
| IR Range                         | Up to 80 m                                                                   |
| Dimensions                       | 985 mm × 92 mm × 269.6 mm (3.3" × 3.6" × 10.6")                              |
| Weight                           | Approx. 910 g (2.01 lb)                                                      |
| Junction Box                     |                                                                              |
| Pole Mount                       | HTH-275ZJ                                                                    |