


HACC-C802

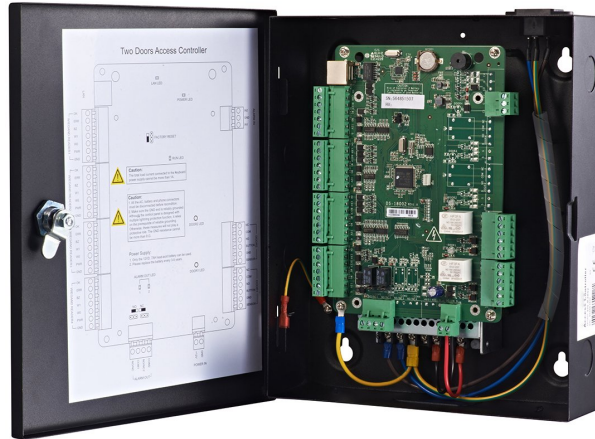

FEATURES

Double Door Access Controller

- 32 bit high speed processor
- TCP/IP network communication, with self adaptive network interface. The communication data is encrypted to ensure information security.
- The recognition and storage of card number with maximum 20 digits
- Online upgrade function and online remote control of doors.
- Support Zone Alarm
- Various indicators to show different device status
- Support time synchronization via NTP, manual or automatic method
- Data can be permanently saved when the access controller is powered off

Specifications	
Model Number	HACC-C802
Working Voltage	DC 12V
Power Dissipation (without load)	3.5W
Processor	32-bit
Uplink Communication Interface	TCP/IP Network Interface and RS 485 Interface
Downlink Communication Interface	Wiegand interface
Storage	10 thousands valid card information and 50 thousands card swiping records
LED Indicator	Power Supply Status, Communication Status, Abnormal Status
Built-In Clock	Yes

°Specifications	
Accessible Card Reader	4 Card Readers (Wiegand Interface) Connectable
Input Interface	Door Magnetic x 2, Door Switch x 2, Case input x 2
Output Interface	Door Switch Relay x 2, Alarm Relay x 2
Working Temperature	-20°C to 65°C (-4°F ~ 149°F)
Working Humidity	10% - 90% (Non-Condensing)
Dimenions	11.3" x 9.4" 2.8"