




HACC-R801M

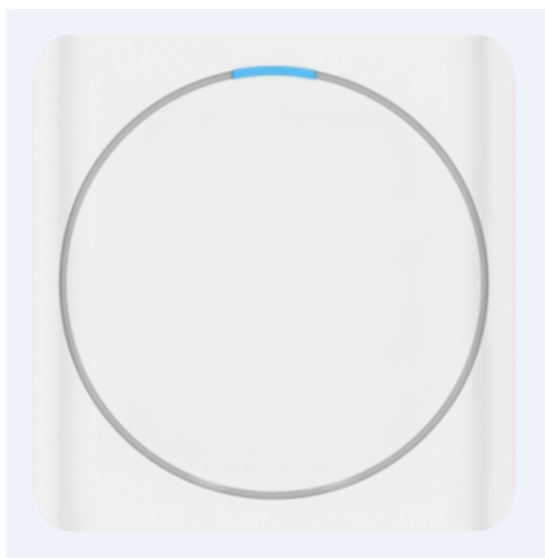

FEATURES

Inductive Card Reader

- PC+ABS material shell
- IP65 Standard
- Wiegand(w26, w34) Protocol
- Supports Mifare Card recognition, and Mifare card number reading
- Supports opening door by swiping card
- High/Low Temperature resistant design

| Specifications | |
|--------------------------------|---------------------------------------|
| Model Number | HACC-R801M |
| Working Voltage | DC 12V |
| Working current | |
| Processor | 8-bit |
| Reading Card | Mifare Card |
| Reading Range | 30 to 50mm (1.18" to 1.96") |
| Audio Alert | Beeper |
| Power consumption | 1.5W |
| Keypad | No Keypad |
| Uplink communication interface | Wiegand interface |
| LED Indicator | Power Indicator, Status LED Indicator |
| Working Temperature | -30°C to 65°C (-22°F ~ 149°F) |
| Working Humidity | 10% - 90% (Non-Condensing) |

| °Specifications | |
|-------------------|-----------------------|
| Protection Rating | IP 65 |
| Dimensions | 3.43" x 3.43" x 0.53" |