B/W MINIATURE CAMERA

HTC-25036C

SPECIFICATIONS

ITEMS	HTC-25036C
PICK UP DEVICE	1/3" CCD IMAGE SENSOR
PICTURE ELEMENTS	EIA:510H x 492V - CCIR:500H x 582V
H. SYNC.FREQUENCY	EIA:15.734kHz. - CCIR:15.625 kHz
V. SYNC. FREQUENCY	EIA:59.94Hz - CCIR:50Hz
SCANNING SYSTEM	2:1 INTERLACE
HORIZONTAL RESOLUTION	More than 420 Lines
SENSITIVITY	0.1 Lux F=2.0
LENS	3.6mm (standard)
S/N RATIO	More than 48 dB
ELECTRONIC SHUTTER	Auto, Up TO 1/100,000 sec.
GAMMA	0.45
VIDEO OUTPUT	1 Vpp,75 Ohms
POWER SUPPLY	12 VDC (+/- 10%)
POWER CONSUMPTION	100 mA (+/- 10%)
WEIGHT (gr)	50
STORAGE TEMPERATURE	-30 to + 60 Degree C
OPERATING TEMPERATURE	-10 to + 45 Degree C

Option lens: 2.9mm, 6.0mm, 8.0mm, 12.0mm, 3.7mm corn type pin hole lens

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
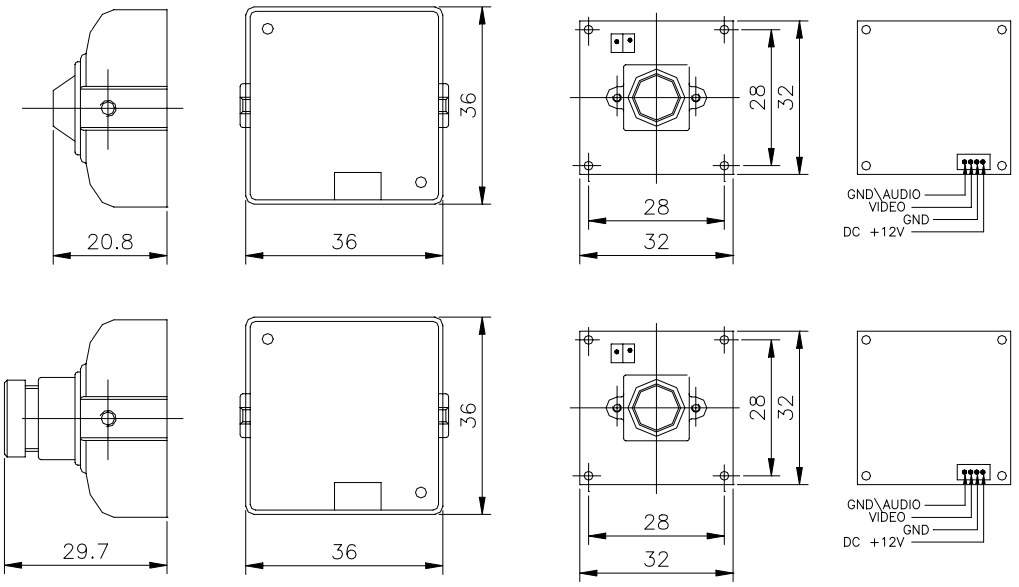
Dimensions & Connector