

HJR,HPS-2400 Series

24V AC Voltage Camera Power


4, 8 or 16 CAMERA OUTPUTS

**SELF-RESETTING
SMARTFUSES**

120V AC INPUT

**SELECTABLE OUTPUT
24 AC**

SURGE SUPPRESSION

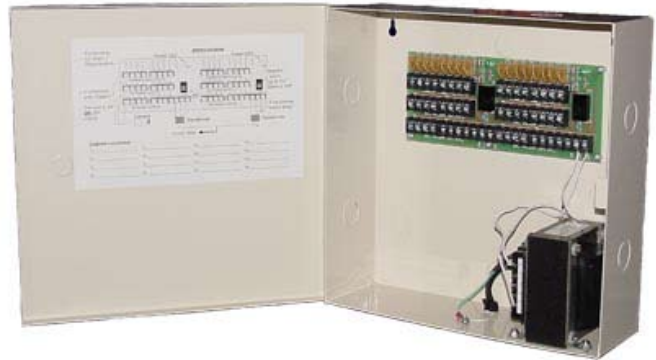

The HJR, HPS-2400 series of camera power supplies provides several unique features for easier installation, greater reliability and unequaled flexibility. They are ideal in any multi-camera installation, avoiding the need to tie up one electrical outlet per camera, and provide significant advantages over multiple plug-in transformers in safety, convenience, neatness and cost.

All models provide multiple outputs, protected by self-restoring *SmartFuses*. These react to the same influences as a glass fuse but reset themselves when the surge has passed or the fault is removed, eliminating costly service calls just to replace blown fuses. Built-in surge suppression protects your cameras from transients. A roomy metal can allows plenty of space for wiring and multiple knockouts provide for easy installation.

SPECIFICATIONS

ALL MODELS


Input Voltage: 120V AC

Output Voltage: 24V AC
transformer selectable voltage output.

Wiring conforms to UL Class II requirements according to UL2044.

Each camera is connected to a common terminal and a 24VAC terminal from the transformer.

The board shown provides 4 outputs, each protected by a self-resetting *SmartFuse*.



M O D E L	OUTPUTS	Output Rating	Total Amps	Can Size (INCHES)
HJR-2440UL	4	1.85 Amps	4	9X8X3.5
HPS-2440S-8	4	3 Amps	8	11.25X11.25X3.5
HJR-2480UL	8	1.85 Amps	4	9X8X3.5
HPS-2480S-8	8	3 Amps	8	11.25X11.25X3.5
HPS-2480S-16	8	3 Amps	16	11.25X11.25X3.5
HJR-2416UL	16	1.85 Amps	8	11.25X11.25X3.5
HPS-2416S-16	16	3 Amps	16	11.25X11.25X3.5