



How to use recess mount housing

※ Thank you for purchasing a camera.
Before attempting to connect or operate this product,
please read these instructions carefully and save this
manual for future use.

■ Components

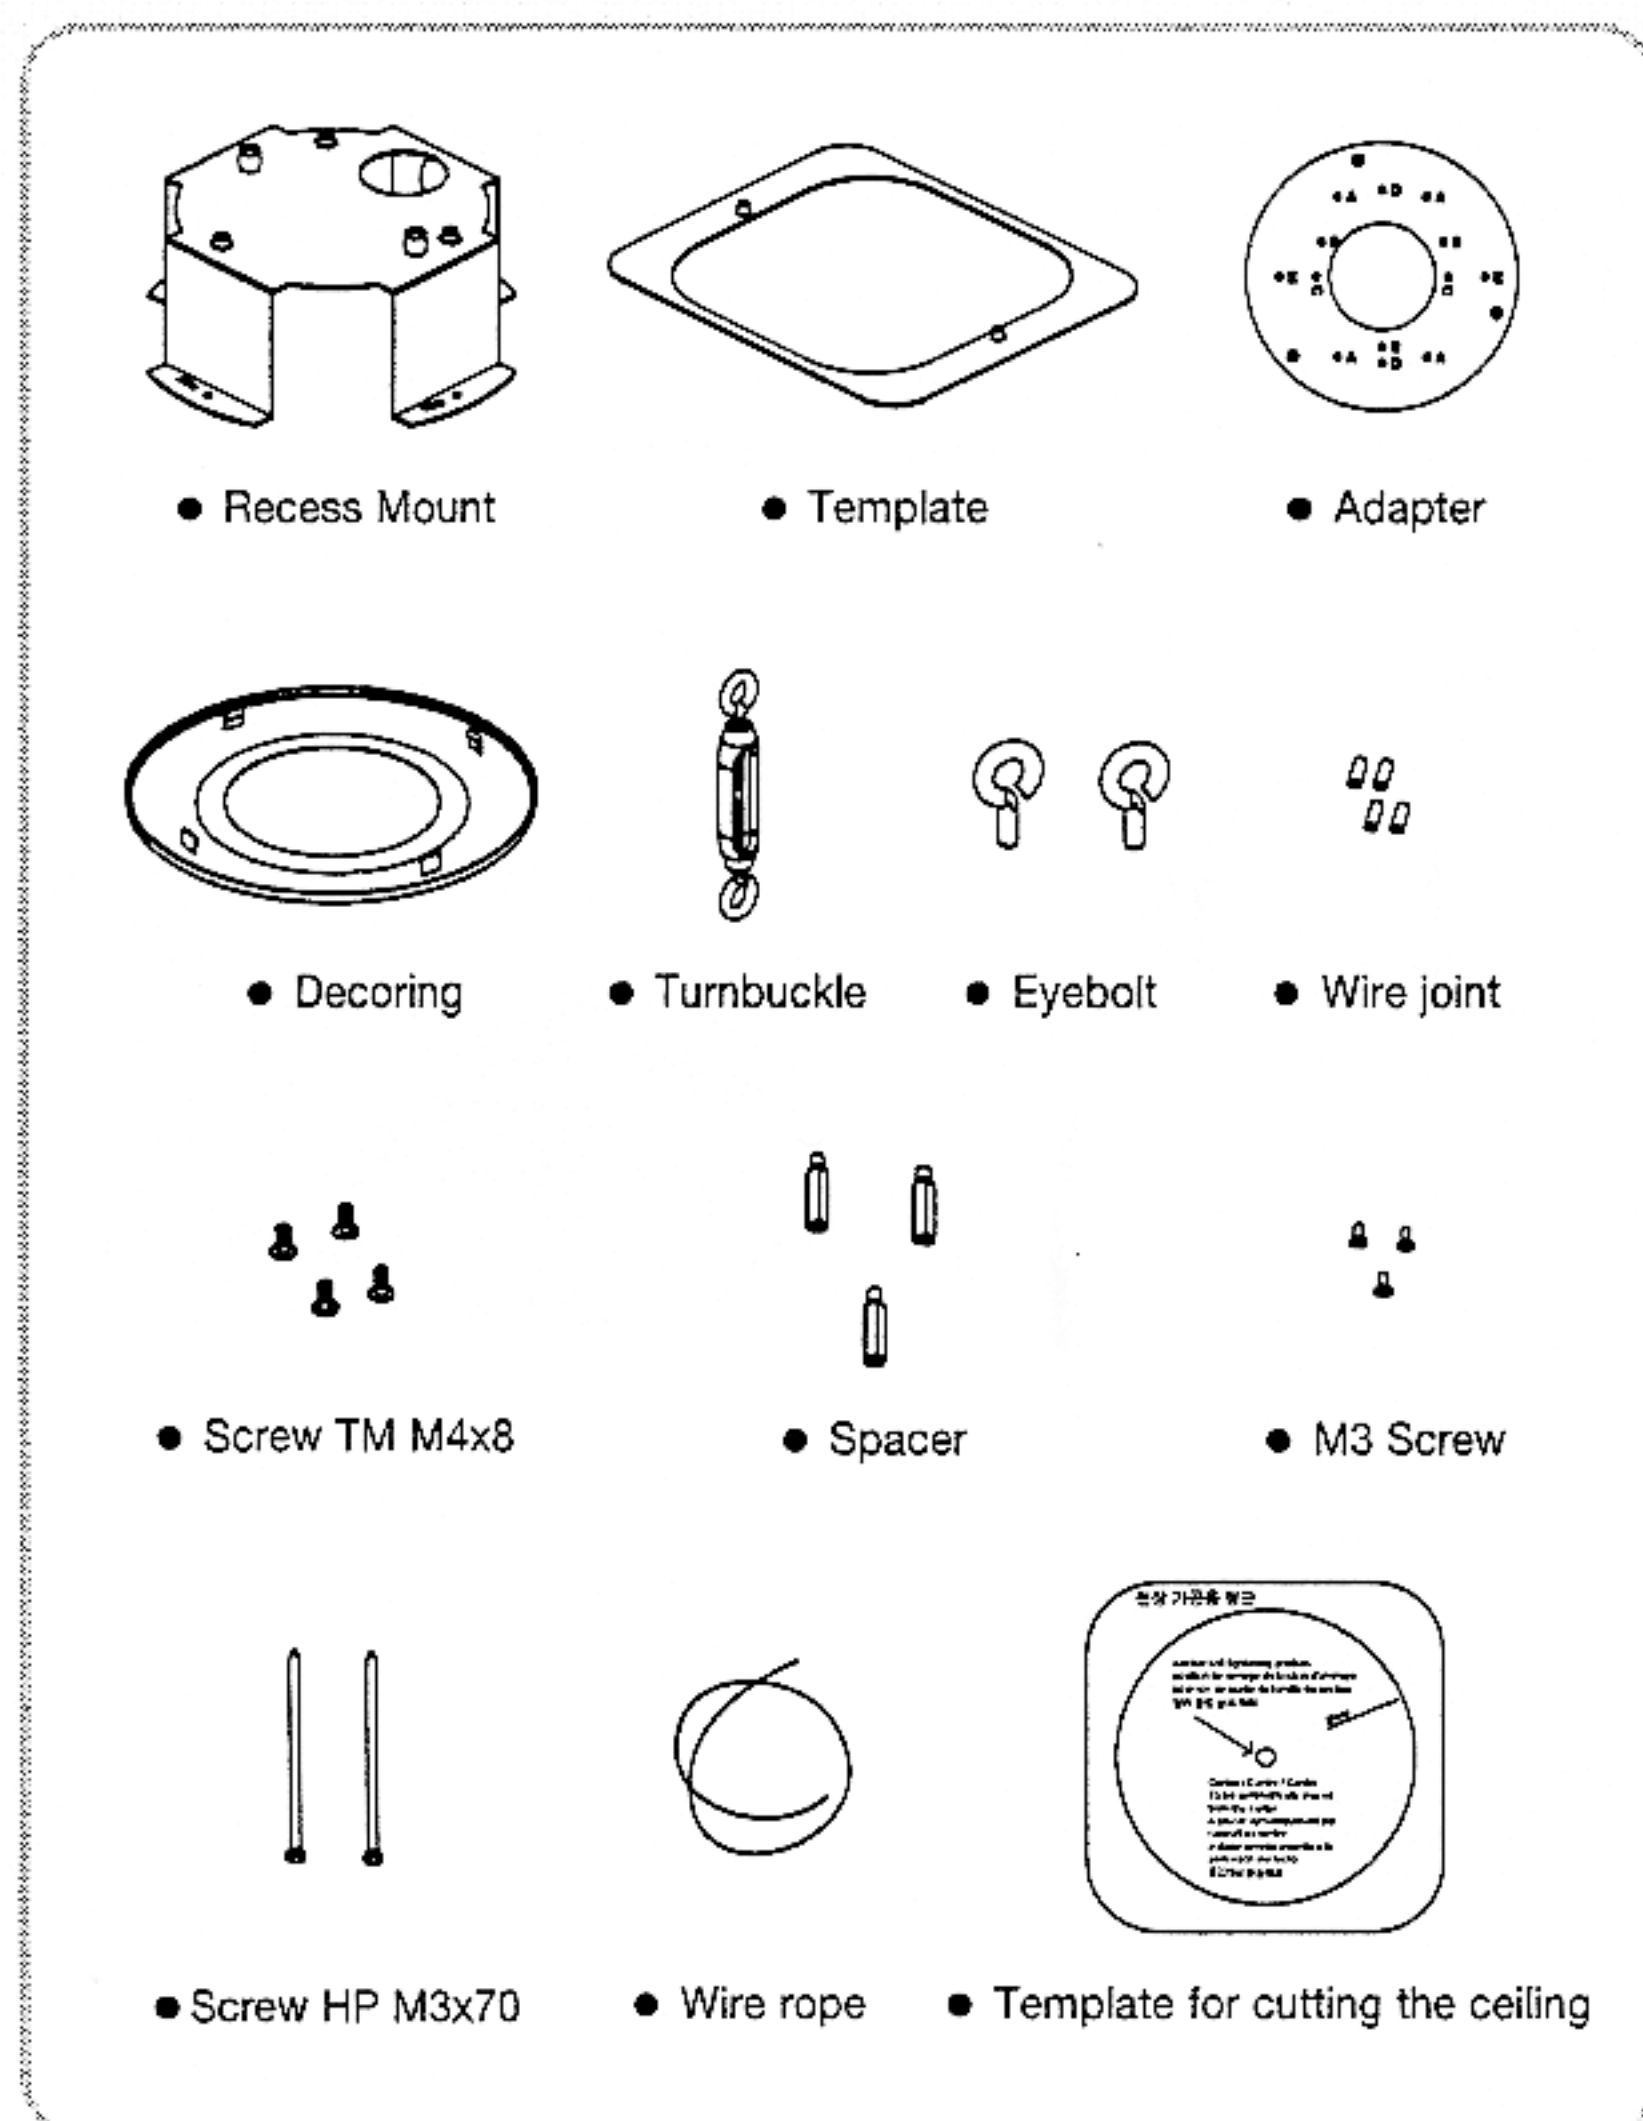


■ How to use Adaptor

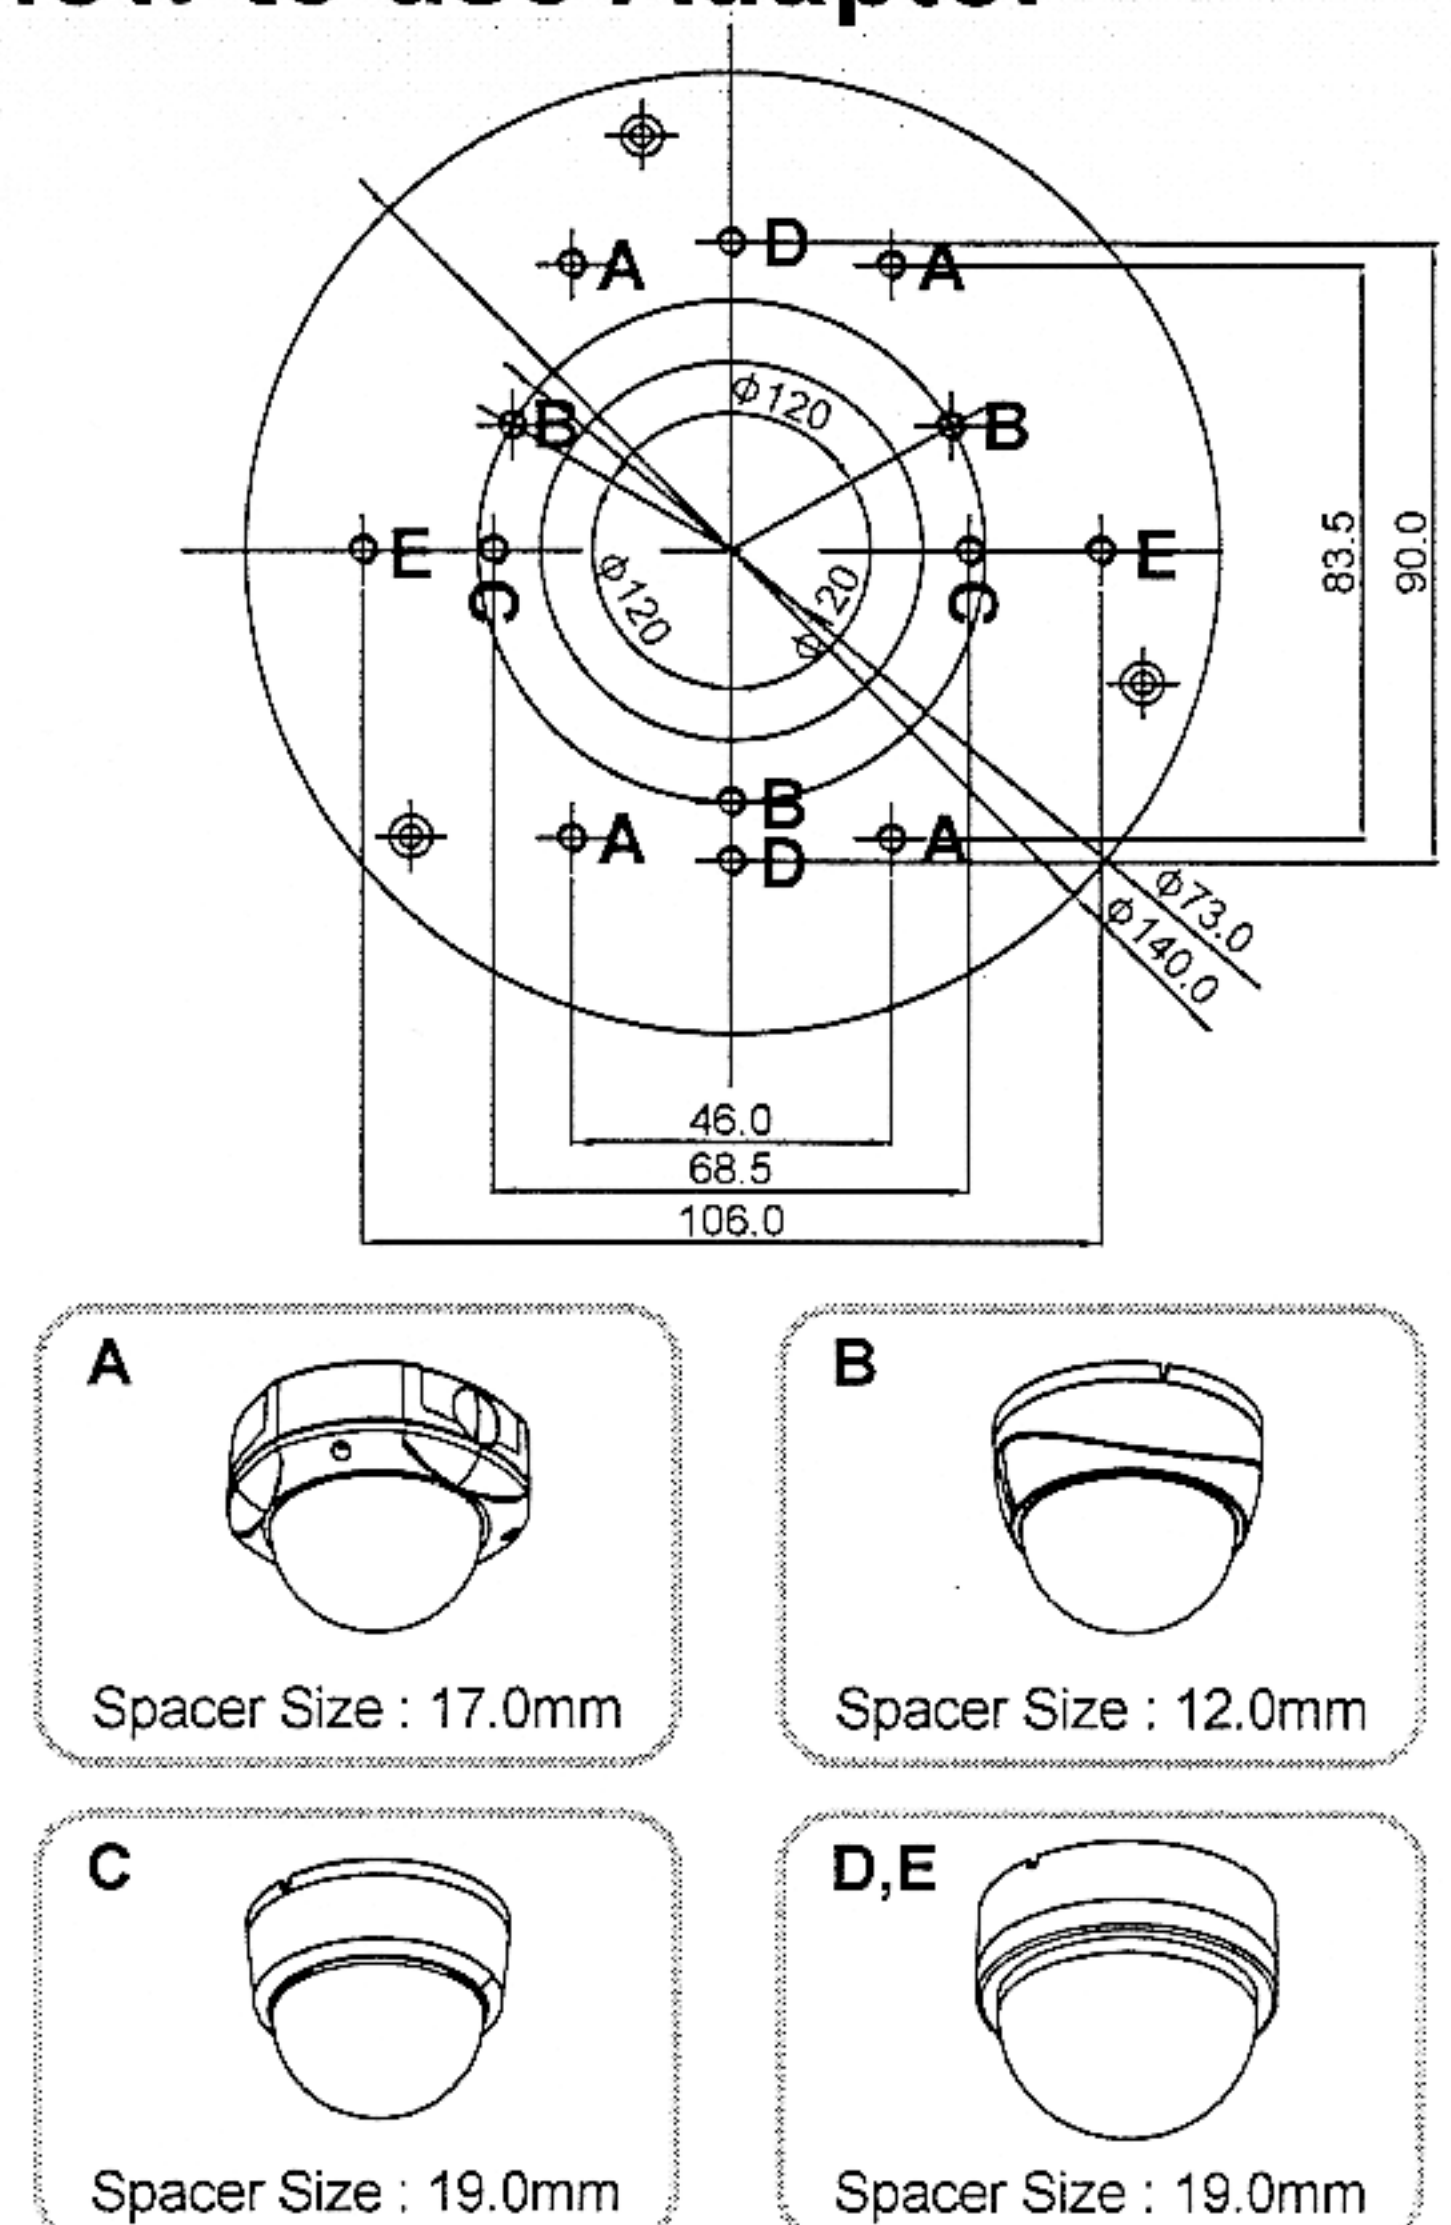


■ INSTALLATION


- ① Put the template on the right part of ceiling for installation and make a hole
- ② Please draw outside service wire from the hole of ceiling.

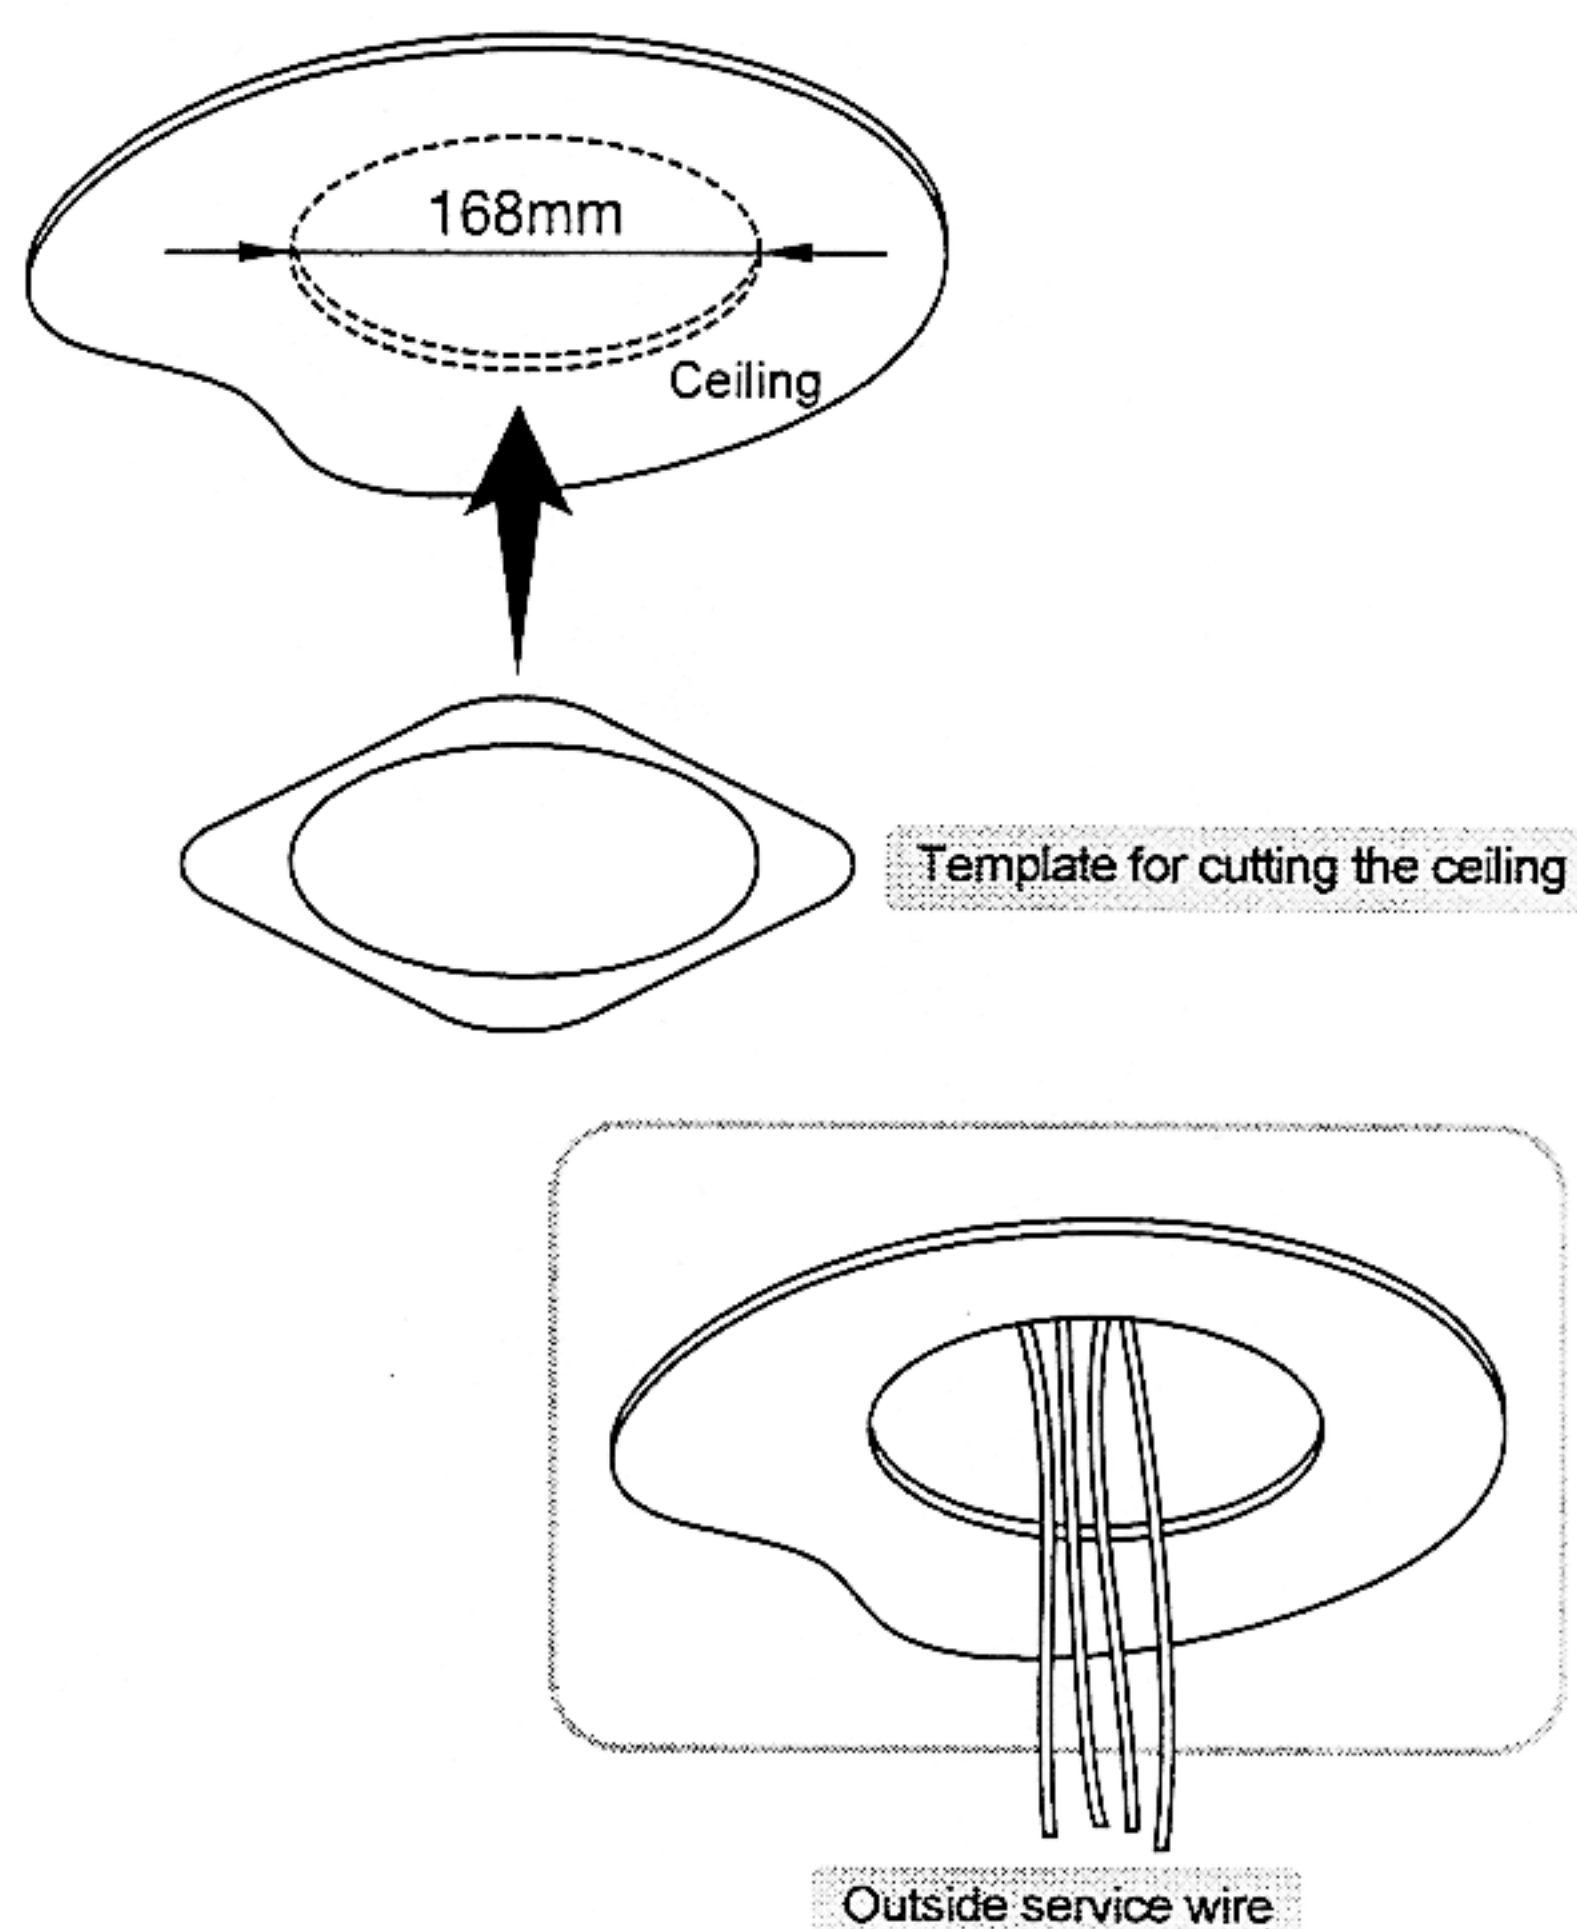

- ③ Put the recess mount housing, adaptor fabrication and base of the camera together. Fix them using TM M4xL8 screw which has o-ring on it, as picture shows.
- ④ Fix the dome cover to the base using L-wrench (accessories for assembling camera)

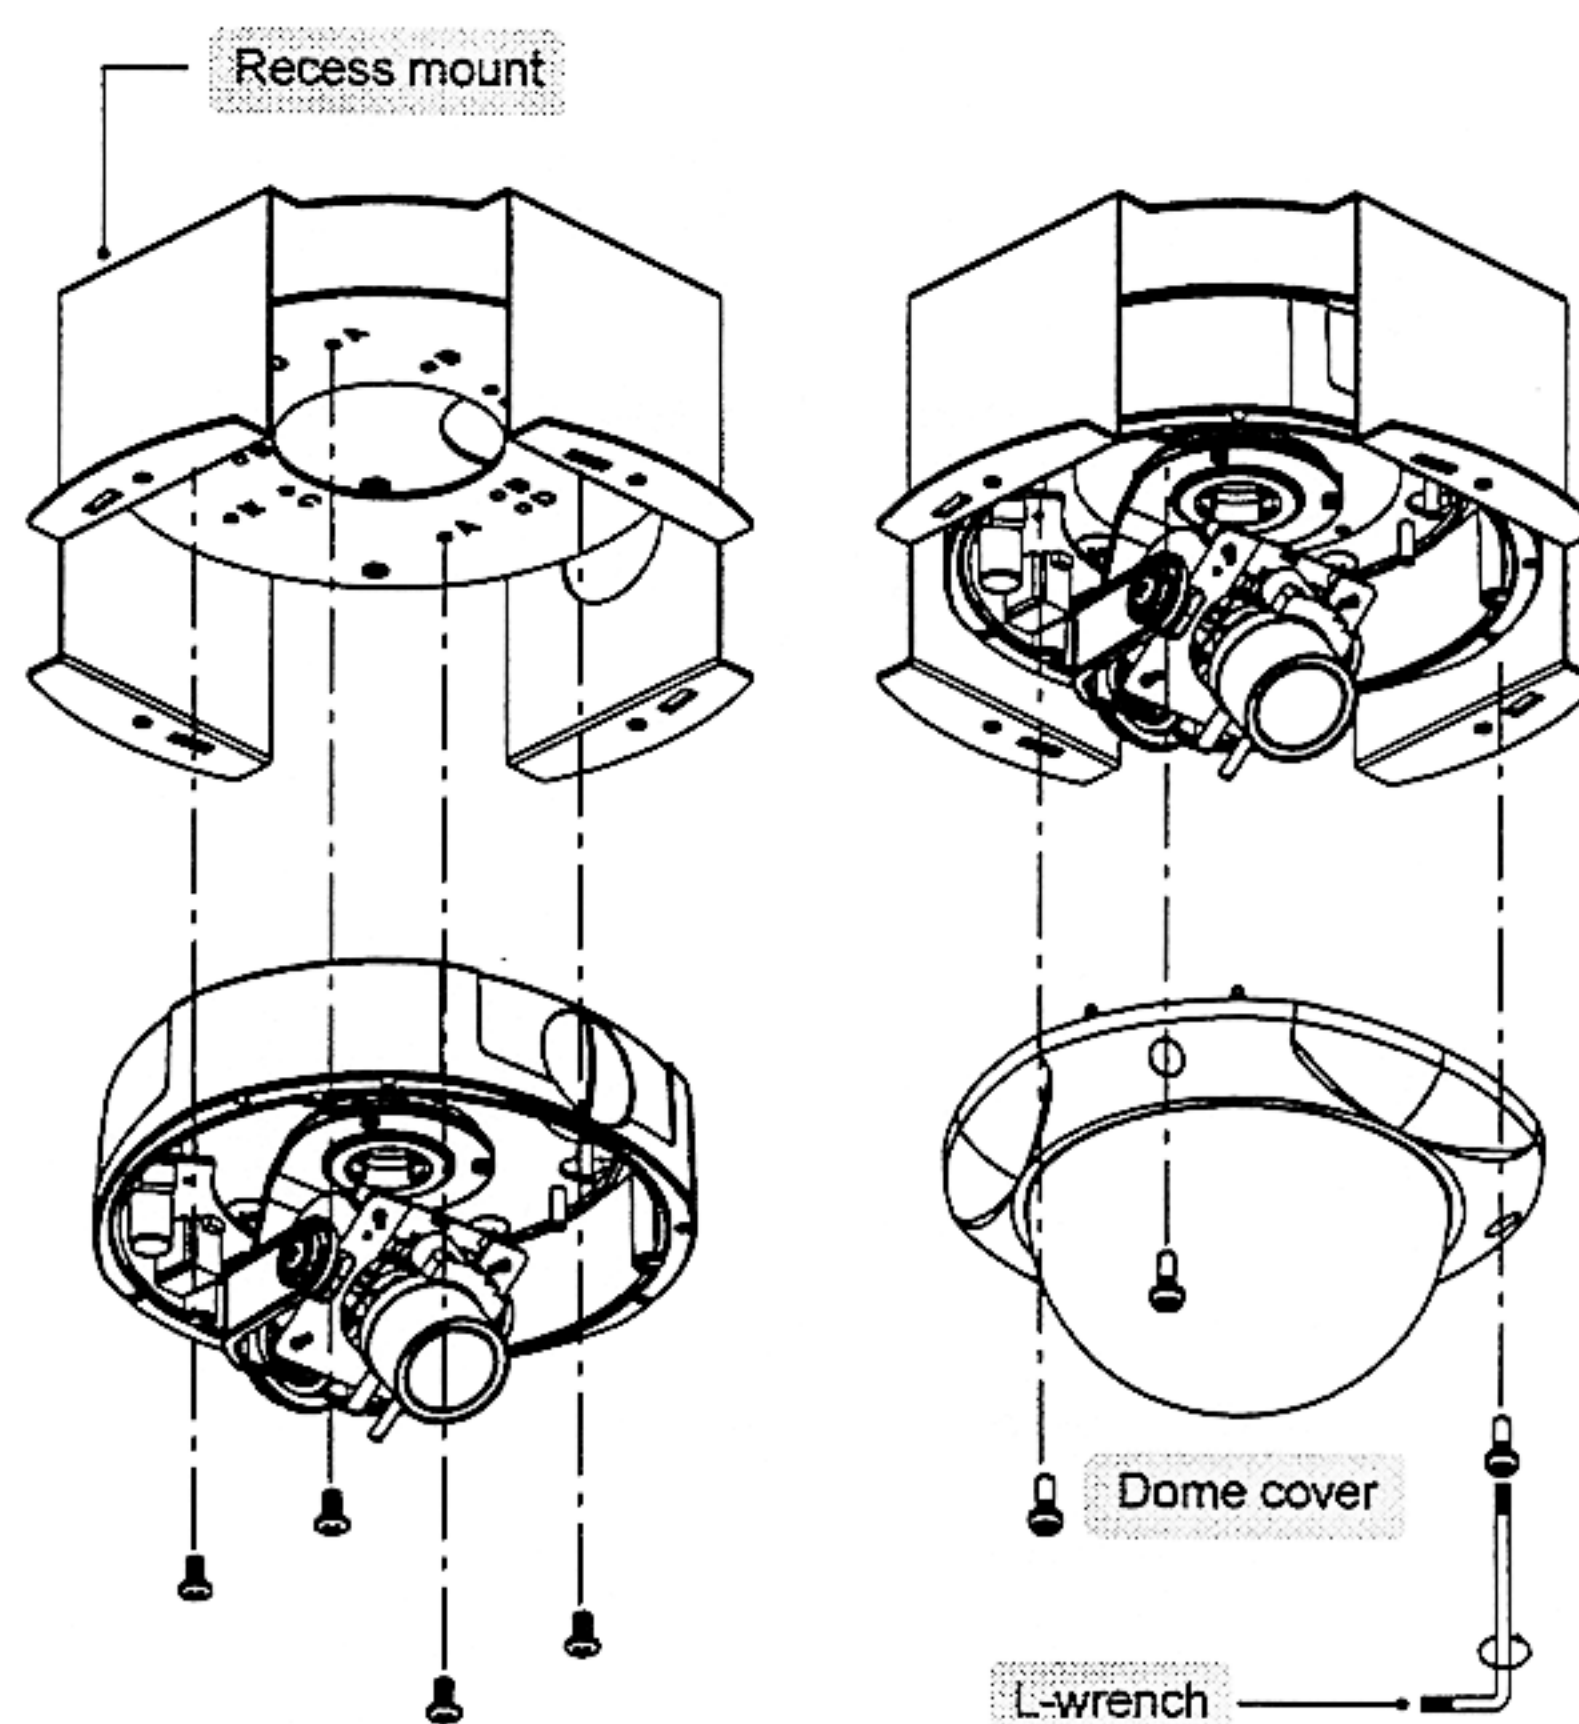

- ⑤ Put the template into the hole of ceiling.
- ⑥ Connect eyebolt to the recess mount housing. Fix the wire rope to inside ceiling.
- ⑦ Please adjust length of wire rope using Tumbuckle.
- ⑧ As picture shows, insert recess mount housing into the ceiling. Fix it to the template using screw HP M3x70.

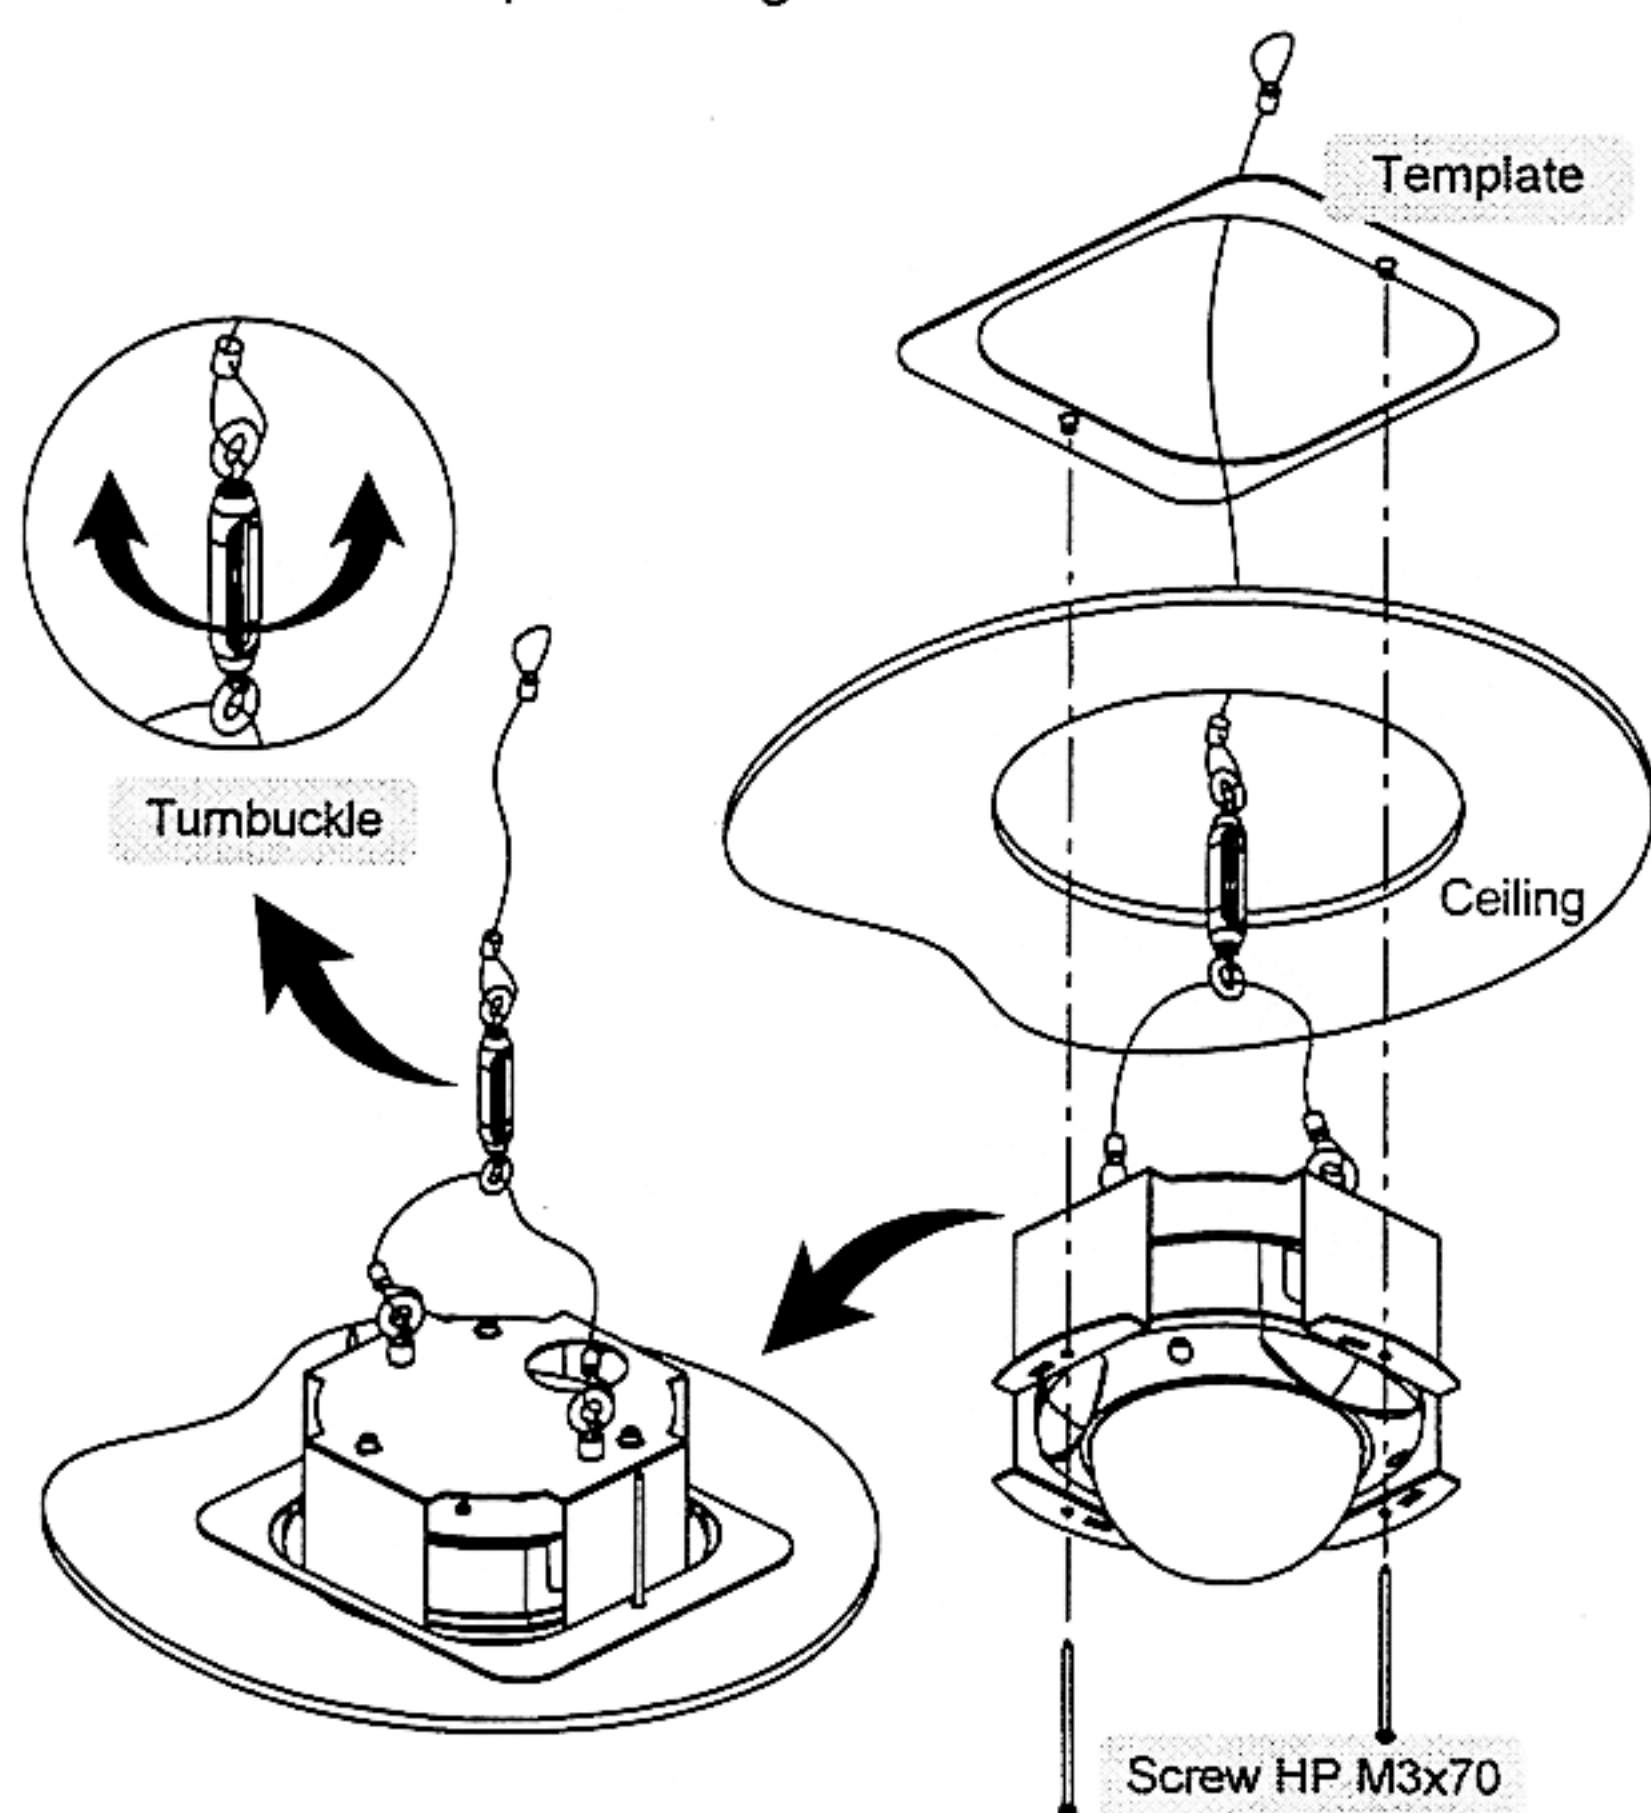

- ⑨ Fit the part of decoration ring into each right hole of housing and press the ring lightly.

