




SD2HD

Key Features

- CVBS to HD-SDI converter
- Max 6ch CVBS signal input
- NTSC/PAL switch selectable
- 1/4/6 split-screen output selectable
- 16:9 or 4:3 video ratio selectable
- Power LED indicator

Dimensions

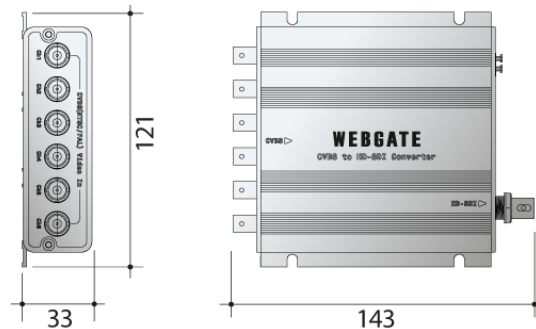

Specifications

VIDEO INPUT

Video input standard 6CH (NTSC/PAL CVBS)

VIDEO OUTPUT

Video output standard 1CH (HD-SDI SMPTE 292M)

Resolution SMPTE274M(1080p30/25)

INTERFACE

Indication LED Power LED(REDF)

Mode select switch
 SW1 : NTSC/PAL select
 SW2 : Split-Screen select
 SW3 : Split-Screen select
 SW4 : 16:9/4:3 Mode select

ENVIRONMENTAL & PHYSICAL

Dimension 143(W) x 121(D) x 33(H) mm

Weight Approx. 320g(0.7 lbs)

Operating temperature 0°C to +50°C / 20%RH to 80%RH

Input Voltage DC12V

Power consumption Max 5W

Approval KC, FCC, CE, RoHS