



Long Range Twisted Pair Transmission System – Active Series

ITEM NO.: HTA-TTA111VR-1

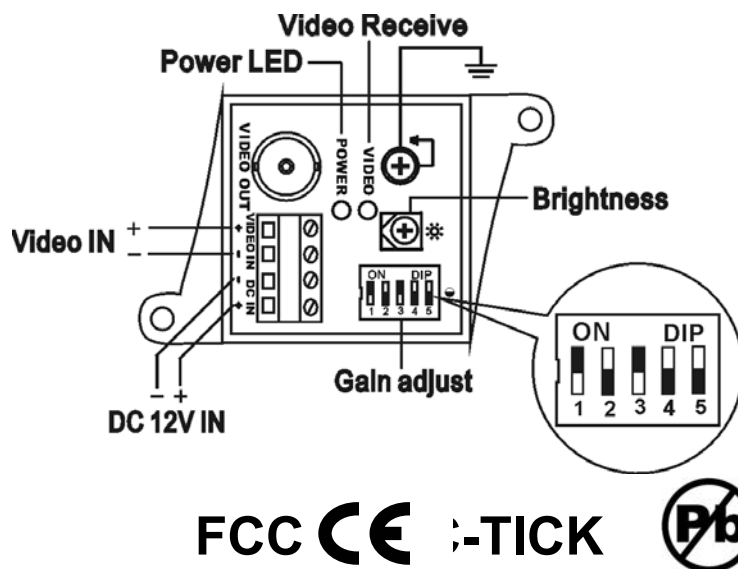


Features:

- Transmit a full motion color or monochrome video signal and data signal (RS422, RS485), audio (TTA111AV). Color range 1500 meters, B/W video signal up to 2400 meters.
- Three position range switch for gain select on Transmitter HTA-TTA111VT-1.
- Five position distance range switch on Receiver HTA-TTA111VR-1,
- System is integrated with alarm sensor (PIR, Magnetic, etc.) or data. (Pan, Tilt, Zoom).
- Built in transient protection and ground lifting, damaging voltage spike problems are eliminated.
- Red LED: Power on / off.
- Green LED: Video receive/loss.

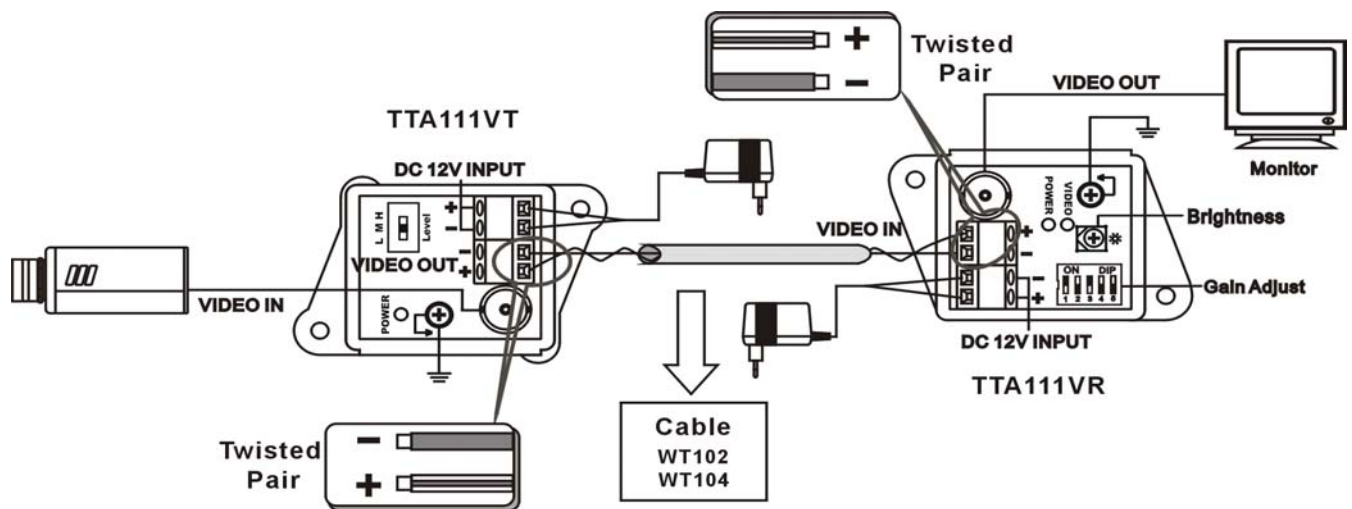

Installation View: HTA-TTA111VR-1

VIDEO GAIN ADJUSTING (Receiver)			RJ - 45 Jack		
			PIN	Color	Function
 ON ↓ 1 2 3 4 5	Press 1 0~300M	Press 4 900~1200M	1	W-O	D1-
	Press 2 300~600M	Press 5 1200~1500M	2	O	D1+
	Press 3 600~900M		3	W-G	Audio +
			4	BL	D2+
			5	W-BL	D2-
			6	G	Audio -
			7	W-BR	Video +
			8	BR	Video -

ITEM NO.	HTA-TTA111VR-1	
VIDEO OUTPUT	1Vp-p , 75 Ohms (BNC Connector)	
DC INPUT	DC 12V	
POWER CONSUMPTION	40mA(max)	
VIDEO GAIN ADJUSTING	Press 1 0~300M	Press 5 1200~1500M
	Press 2 300~600M	
	Press 3 600~900M	
	Press 4 900~1200M	
RECOMMENDED CABLE	CAT-5 UTP Cable 4 pair (24AWG)	
DIMENISONS W x H x D mm	109x77x24	49x42x45